Request? scs@kinshofer.com

14 - 24t SP20H Double Ballast Plough

The SP20H Double Ballast Plough is the ideal tool to collect or spread ballast and gravel – for road rail excavators from 14t - 24t / 30,800 - 52,800 lbs operating weight.

- **Easy to use:** the plough is pushed along the track on the rails while distributing the ballast evenly on the track.
- **For different loose materials** such as gravel, ballast, etc.
- **Adjustable plough depth** (4 x adjustable).
- **Different couplings** available.
- **Robust construction** without protruding parts.
- **Side flaps tiltable ± 45°.**

Double Ballast Plough SP20H

Type	Weight	Length B max.	Height C (w/o coupling)	Width E max.	For rail distance	Tilt angle side flaps
	(kg / lbs)	(mm / in)	(mm / in)	(mm / in)	(mm / in)	(°)
SP20H	1150 / 2530	2120 / 83.5	750 / 29.5	3200 / 126.0	1505 / 59.3	± 45

Package consists of: double ballast plough

Accessories

Type	Description
T650 rigid	bolt-on adapter for "Atlas" quick coupler T620

Note: for adapters see mounting options

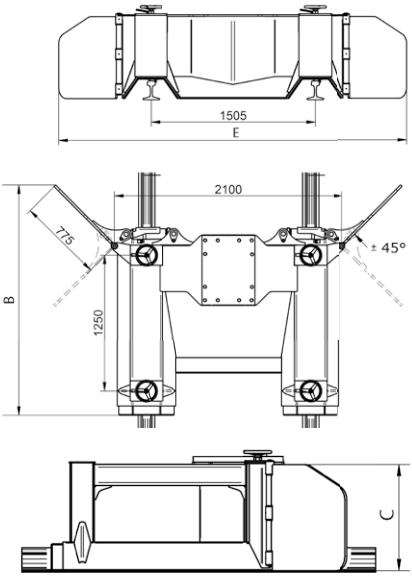

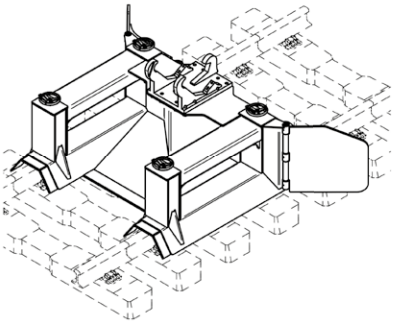

below:
with lateral flaps folded away

Requirements of Excavator

Two hydraulic circuits needed

Operating pressure	Recommended oil flow
max. 20 - 32 MPa (200 - 320 bar) / max. 2,880 - 4,610 psi	50 - max. 75 l/min / 13.2 - max. 19.8 GPM

We reserve the right to amend specifications without prior notice! KINSHOFER GmbH, 83607 Holzkirchen, Germany