Levelling Bar for NOX Tiltrotators up to 8t / *17,600lbs* AVB

The AVB Levelling Bar with roller for NOX Tiltrotators is the ideal tool to level material for a smooth surface for excavators with up to 8t/17,600lbs operating weight.

- **Robust design:** no protruding parts, stable construction.
- **Effective distribution and levelling** of gravel etc.
- **Different adapters** available.
- **Different widths** available.

here with adapter

Request? exc@kinshofer.com

Levelling Bar with roller AVB

Type	for NOX	Width (mm/in)	Weight (kg/lbs)	Operating weight (t/lbs)	Roll diameter (Ø/mm/in)
AVB 8-1800	TR07NOX / TR11NOX	1,800 / 70.8	230 / 506	< 8 / 17,600	273 / 9.57
AVB 8-2100	TR07NOX / TR11NOX	2,100 / 82.6	250/ 550	< 8 / 17,600	324 / 12.76

Package consists of: levelling bar with roller

Note: adapters of other manufacturers on request

Accessories

Type	Description
KSW03-AVB	adapter for system L-Lock KMS03L/KHS03L – up to 6.5t / 14,300lbs
KSW08-AVB	adapter for system L-Lock KMS08L/KHS08L – up to 12t / 26,400lbs
OQ40-AVB	adapter for system Oilquick OQ40 – up to 5t / 11,000lbs
OQ45-5-AVB	adapter for system Oilquick OQ45-5 – up to 12t / 26,400lbs
S40-AVB	adapter for system S-Lock KMS40S/KHS40S – up to 6t / 13,200lbs
S45-AVB	adapter for system S-Lock KMS45S/KHS45S – up to 11t / 24,200lbs
S50-AVB	adapter for system S-Lock KMS50S/KHS50S – up to 11t / 24,200lbs

Picture

We reserve the right to amend specifications without prior notice. KINSHOFER GmbH, 83607 Holzkirchen, Germany

Levelling Bar for NOX Tiltrotators up to 24t / *52,800lbs* AVB

The AVB Levelling Bar with roller for NOX Tiltrotators is the ideal tool to level material for a smooth surface for excavators with up to 24t/52,800lbs operating weight.

- **Robust design:** no protruding parts, stable construction.
- **Effective distribution and levelling** of gravel etc.
- **Different adapters** available.
- **Different widths** available.

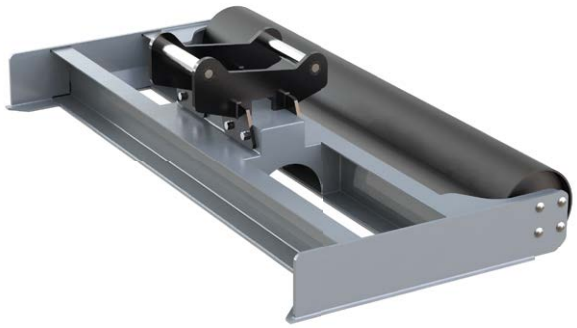

here with adapter

Request? exc@kinshofer.com

Levelling Bar with roller AVB

Type	for NOX	Width (mm/in)	Weight (kg/lbs)	Operating weight (t/lbs)
AVB 24-2500	TR14NOX / TR19NOX / TR25NOX	2,500 / 98.4	420 / 924	< 24 / 52,800
AVB 24-2700	TR14NOX / TR19NOX / TR25NOX	2,700 / 106.3	470 / 748	< 24 / 52,800

Package consists of: levelling bar with roller

Note: adapters of other manufacturers on request

Accessories

Type	Description
KSW10-AVB	adapter for system L-Lock KMS10L/KHS10L – up to 19t/41,800lbs
KSW21/25-AVB	adapter for system L-Lock KMS21/25L / KHS21/25L – up to 40t/88,000lbs
OQ60-AVB	adapter for system Oilquick OQ60 – up to 15t/33,000lbs
OQ60-5-AVB	adapter for system Oilquick OQ60-5 – up to 15t/33,000lbs
OQ65-AVB	adapter for system Oilquick OQ65 – up to 22t/48,400lbs
OQ70-AVB	adapter for system Oilquick OQ70 – up to 28t/61,600lbs
OQ70/55-AVB	adapter for system Oilquick OQ70/55 – up to 32t/70,400lbs
S60-AVB	adapter for system S-Lock KMS60S/KHS60S – up to 18t/39,600lbs
S70-AVB	adapter for system S-Lock KMS70S/KHS70S – up to 30t/66,000lbs

Picture

We reserve the right to amend specifications without prior notice. KINSHOFER GmbH, 83607 Holzkirchen, Germany